

Worldwide Response Center

# HP 3000 APPLICATION NOTE # 91

## Using The Port Structure Under MPE/XL



**HP Computer Museum**  
**[www.hpmuseum.net](http://www.hpmuseum.net)**

**For research and education purposes only.**

## RESPONSE CENTER APPLICATION NOTES

HP 3000 APPLICATION NOTES are published by the Worldwide Response Center and are distributed with the Software Status Bulletin. These notes address topics where the volume of calls received at the Center indicates a need for addition to or consolidation of information available through HP support services.

Following this publication you will find a list of previously published notes and a Reader Comment Sheet. You may use the Reader Comment Sheet to comment on the note, suggest improvements or future topics, or to order back issues. We encourage you to return this form; we'd like to hear from you.

### NOTICE

*The information contained in this document is subject to change without notice.*

**HEWLETT-PACKARD MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.**

*This document contains proprietary information which is protected copyright. All rights are reserved. Permission to copy all or part of this document is granted provided that the copies are not made or distributed for direct commercial advantage; that this copyright notice, and the title of the publication and its date appear; and that notice is given that copying is by permission of Hewlett-Packard Company. To copy otherwise, or to republish, requires prior written consent of Hewlett-Packard Company.*

Copyright © 1991 by HEWLETT-PACKARD COMPANY

# HP 3000 Application Note # 91

---

## USING THE PORT STRUCTURE UNDER MPE/XL

### Introduction

Ever since it was created, the MPE/XL operating system has always used a specific concept to support the transmission of data between the processes and the process synchronization of the operating system itself.

This concept is known as the PORT FACILITY.

The purpose of this Application Note is to give a general outline of this new system functionality as the MPE/XL release 2.1, in conjunction with the Architected Interface, now allows the users to access these structures.

The following considerations shall be discussed hereunder:

What is a PORT? How are the PORTs used? What is a SUBQUEUE? What is a PORT SERVER? What are the advantages of using the Architected Interface in connection with the PORTs?

### WHAT IS A PORT?

A port is a data structure dedicated to the reception of messages. Under MPE/XL, the only possibility for a system process A to communicate with a system process B consists in the former sending a message to the PORT and process B going to read it on the said PORT.

If needed, process B may come and wait on this PORT until a message comes in, in which case it remains in "standby" state. The incoming message from process A will "awake" B which immediately reads the message made available on the PORT.

For those users accustomed to MPE/V, this inter-process communication feature was formerly supported by the "eXtra-Data Segments", and intrinsics SENDMAIL, RECEIVEMAIL. Note that these concepts are maintained under MPE/XL, albeit only in compatible mode.

In this paper, the following structure will be used to represent a PORT:



There are three different types of PORTs:

1. **MESSAGE PORTs:** the most widely used, for they allow "plain" inter-process message transmission. In other words, a message may consist of a set of characters in a format that can be understood both by the "writer" and the "reader" processes.
2. **SIGNAL PORTs:** these have the same characteristics as the above Message Ports except that the message size is cut to zero byte. Use of the SIGNAL PORT, therefore, will be confined to event triggering and inter-process synchronization.
3. **SEMAPHORE PORTs:** in many ways similar to the SIGNAL PORTs, they were used in the initial versions of MPE/XL. They have now been totally abandoned for the SIGNAL PORTs.

Before we go any further, let us study briefly a concrete example of how a PORT is used by MPE/XL.

A user process is running a FREAD on a file which internally results in this process writing a message onto a PORT of the IO system module. The message will contain information to answer the following questions: Where exactly on the disk should you read from? What length of disk should be read? In what area of the memory should the data read be stored? Once these questions have been sent to the IO system, the user process issues a message reception request on a PORT called IO\_COMPLETION\_PORT.

As can be assumed from its name, this is the port to which the IO module is going to write its message. This message will contain the IO report. The user process then reads the message, and if the report shows that the IO has been successful, the process may continue to run.

This very simple example summarizes the various functions of the PORTs: data transfers between the processes and process synchronization.

## HOW ARE THE PORTs USED?

When a message is sent to a port, it is stored there in a chained FIFO (First-In First-Out)-type list. This means the messages will be read by the process waiting for reception on this PORT, in their order of arrival. Therefore, it is possible to have several messages waiting to be processed on a given PORT.

A process, however, can send only one message at a time to a PORT.

If several messages are to be sent, the process must invoke the sending procedure as many times as required.

Up to now, we have examined the PORT as a global concept. Let us now turn to the notion of SUBQUEUE.

## WHAT IS A SUBQUEUE?

Each PORT is divided into a set of SUBQUEUES (up to 32 per PORT), which actually represent the various chained lists that are attached to a given PORT.

So, this SUBQUEUE concept will be used to assign priorities to the messages queued on this PORT, with SUBQUEUE 0 always having a higher priority than SUBQUEUE 31.

When a message is to be sent to a PORT, the process may do so without specifying the SUBQUEUE, in which case it defaults to SUBQUEUE 0. However, it may also choose to specify a specific SUBQUEUE.

On another hand, a process may wait globally on a PORT, that is it will receive the first message of the highest priority SUBQUEUE. A process may also wait on a given SUBQUEUE of a specific PORT.

Last of all, a SUBQUEUE may be either in ENABLE or DISABLE mode. If it is ENABLED, it is possible to read the messages reaching this PORT, but if it is DISABLED, the messages received on this SUBQUEUE cannot be read, unless the relevant SUBQUEUE number is specified.

Example:

This typical example should help you better understand the concepts of SUBQUEUE, ENABLE, and DISABLE.

Assume a PORT with three SUBQUEUES (0, 1, 2), where SUBQUEUES 0 and 2 are ENABLED, and SUBQUEUE 1 is DISABLED. A number of messages are sent to this port on different SUBQUEUES, as shown in the diagram below. Each message here contains the sending order number on this PORT. So we shall issue a number of reception requests to clearly understand in what order the messages are read.

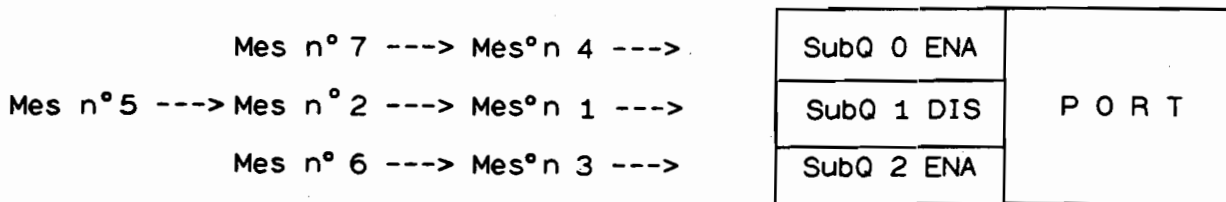


Figure 1-1.

**Request No.1:** read without specifying a SUBQUEUE ==> Mess 4. In this case, a message is received from the highest priority ENABLED SUBQUEUE (0 here).

**Request No.2:** read SUBQUEUE No. 1 ==> Mess 1. Although it is DISABLED (this may be assumed from the fact that the SUBQUEUE for reception has been specified), the first message present on SUBQUEUE 1 is received.

**Request No.3:** read from SUBQUEUE No.0 ==> Mess 7. No comments ... (Message 4 has already been read)

**Request No.4:** read without specifying any SUBQUEUE ==> Mess 3. There is no message left in SUBQUEUE 0, SUBQUEUE 1 is DISABLED, the first message available on the next SUBQUEUE in terms of priority ranking is No.3.

After the concepts of PORT, SUBQUEUE, priority in the SUBQUEUES, we shall now turn to the concept of PORT SERVER.

## **WHAT IS A PORT SERVER?**

A SERVER is a specific section of code which knows where to read and how to process a message on a given PORT. Thus, the function of the PORT is both to store the messages, and also to invoke the SERVER as soon as a message has arrived.

It is mandatory that a SERVER should be non re-entrant, in other words, if a message has just been received on a PORT, the SERVER will run. If, while it is executing, the SERVER is interrupted by the DISPATCHER (pre-emption or timesliced), and another message is received on the PORT, the SERVER is not invoked again. This provides for consistency with the above- described notion of message priority. On completing processing of a message, however, a SERVER is immediately re-invoked if a message has arrived while the former message was being processed, and so on until the PORT is empty.

The various types of SERVERs are described below:

**PROCEDURE SERVER:** in this case, the SERVER is a procedure to be run on the stack of the write process. The advantage of this procedure is that running it does not require loading any specific process. This is why this SERVER is particularly effective in terms of performance.

**PROCESS SERVER:** here the SERVER is a process with its whole operating environment, that is the stack, code and system structures required for its execution. The drawback of the SERVER procedures is that when you start them up, you have to switch contexts, which involves substantial overhead.

The PROCESS SERVER of a PORT is defined at PORT creation, that is as an intrinsic feature of this PORT.

**ANY PROCESS SERVER:** the characteristic of a PORT defined with ANY PROCESS SERVER is that it may be served by any process which has made a message reception request. In this case, a unique process may wait on a PORT. If a second process attempts to wait on the same PORT, an error is returned.

## **WHAT ARE THE ADVANTAGES OF USING THE ARCHITECTED INTERFACE IN CONNECTION WITH THE PORTS?**

After reviewing the concept of PORT, let us now discuss the contribution of the ARCHITECTED INTERFACE (available for MPE/XL 2.1).

The Architected Interface allows you to integrate the PORT concept in your programs with all the related facilities offered in terms of process synchronization. This interface allows you to use all the above functions with the exception of the PROCEDURE SERVER.

Four procedures are available:

**AIFPORTOPEN:** creates a PORT, if it does not exist yet, or opens it if it already exists (like a file, a PORT must be open to be used). A PORT gets a name at creation time, this name should be used for all references to the PORT. The PORT access is protected by a password.

**AIFPORTCLOSE:** closes a PORT, or deletes it.

**AIFPORTSEND:** this procedure is used to send a message to a PORT. The maximum length of the message is 256 bytes.

When writing a message to a PORT, its priority must be defined; in fact, this priority matches the priority of the SUBQUEUE to which it belongs.


Moreover, when the user is sending a message, he is allowed to specify a TIMEOUT in number of seconds. If different from Zero (unlimited wait), this timeout is equal to the time a message remains on a PORT before it is deleted if no process has come to read it. If the TIMEOUT is greater than or equal to 0, the write process is locked in until this message is read or deleted. Otherwise, if the TIMEOUT is negative, the message is written in NONWAIT mode, that is the write process is not locked in until the message has been read or deleted.

**AIFPORTRECEIVE:** this procedure allows reading a message and setting a process to waiting for reception on a PORT. A TIMEOUT may be set for the waiting, a PRIORITY\_MASK which actually defines the ENABLE/DISABLE SUBQUEUES.

## **CONCLUSION**

Message transmission, process synchronization, task priority management ... all of these new functions can now be used by your programs in NATIVE mode from the moment you acquire the Architected Interface.



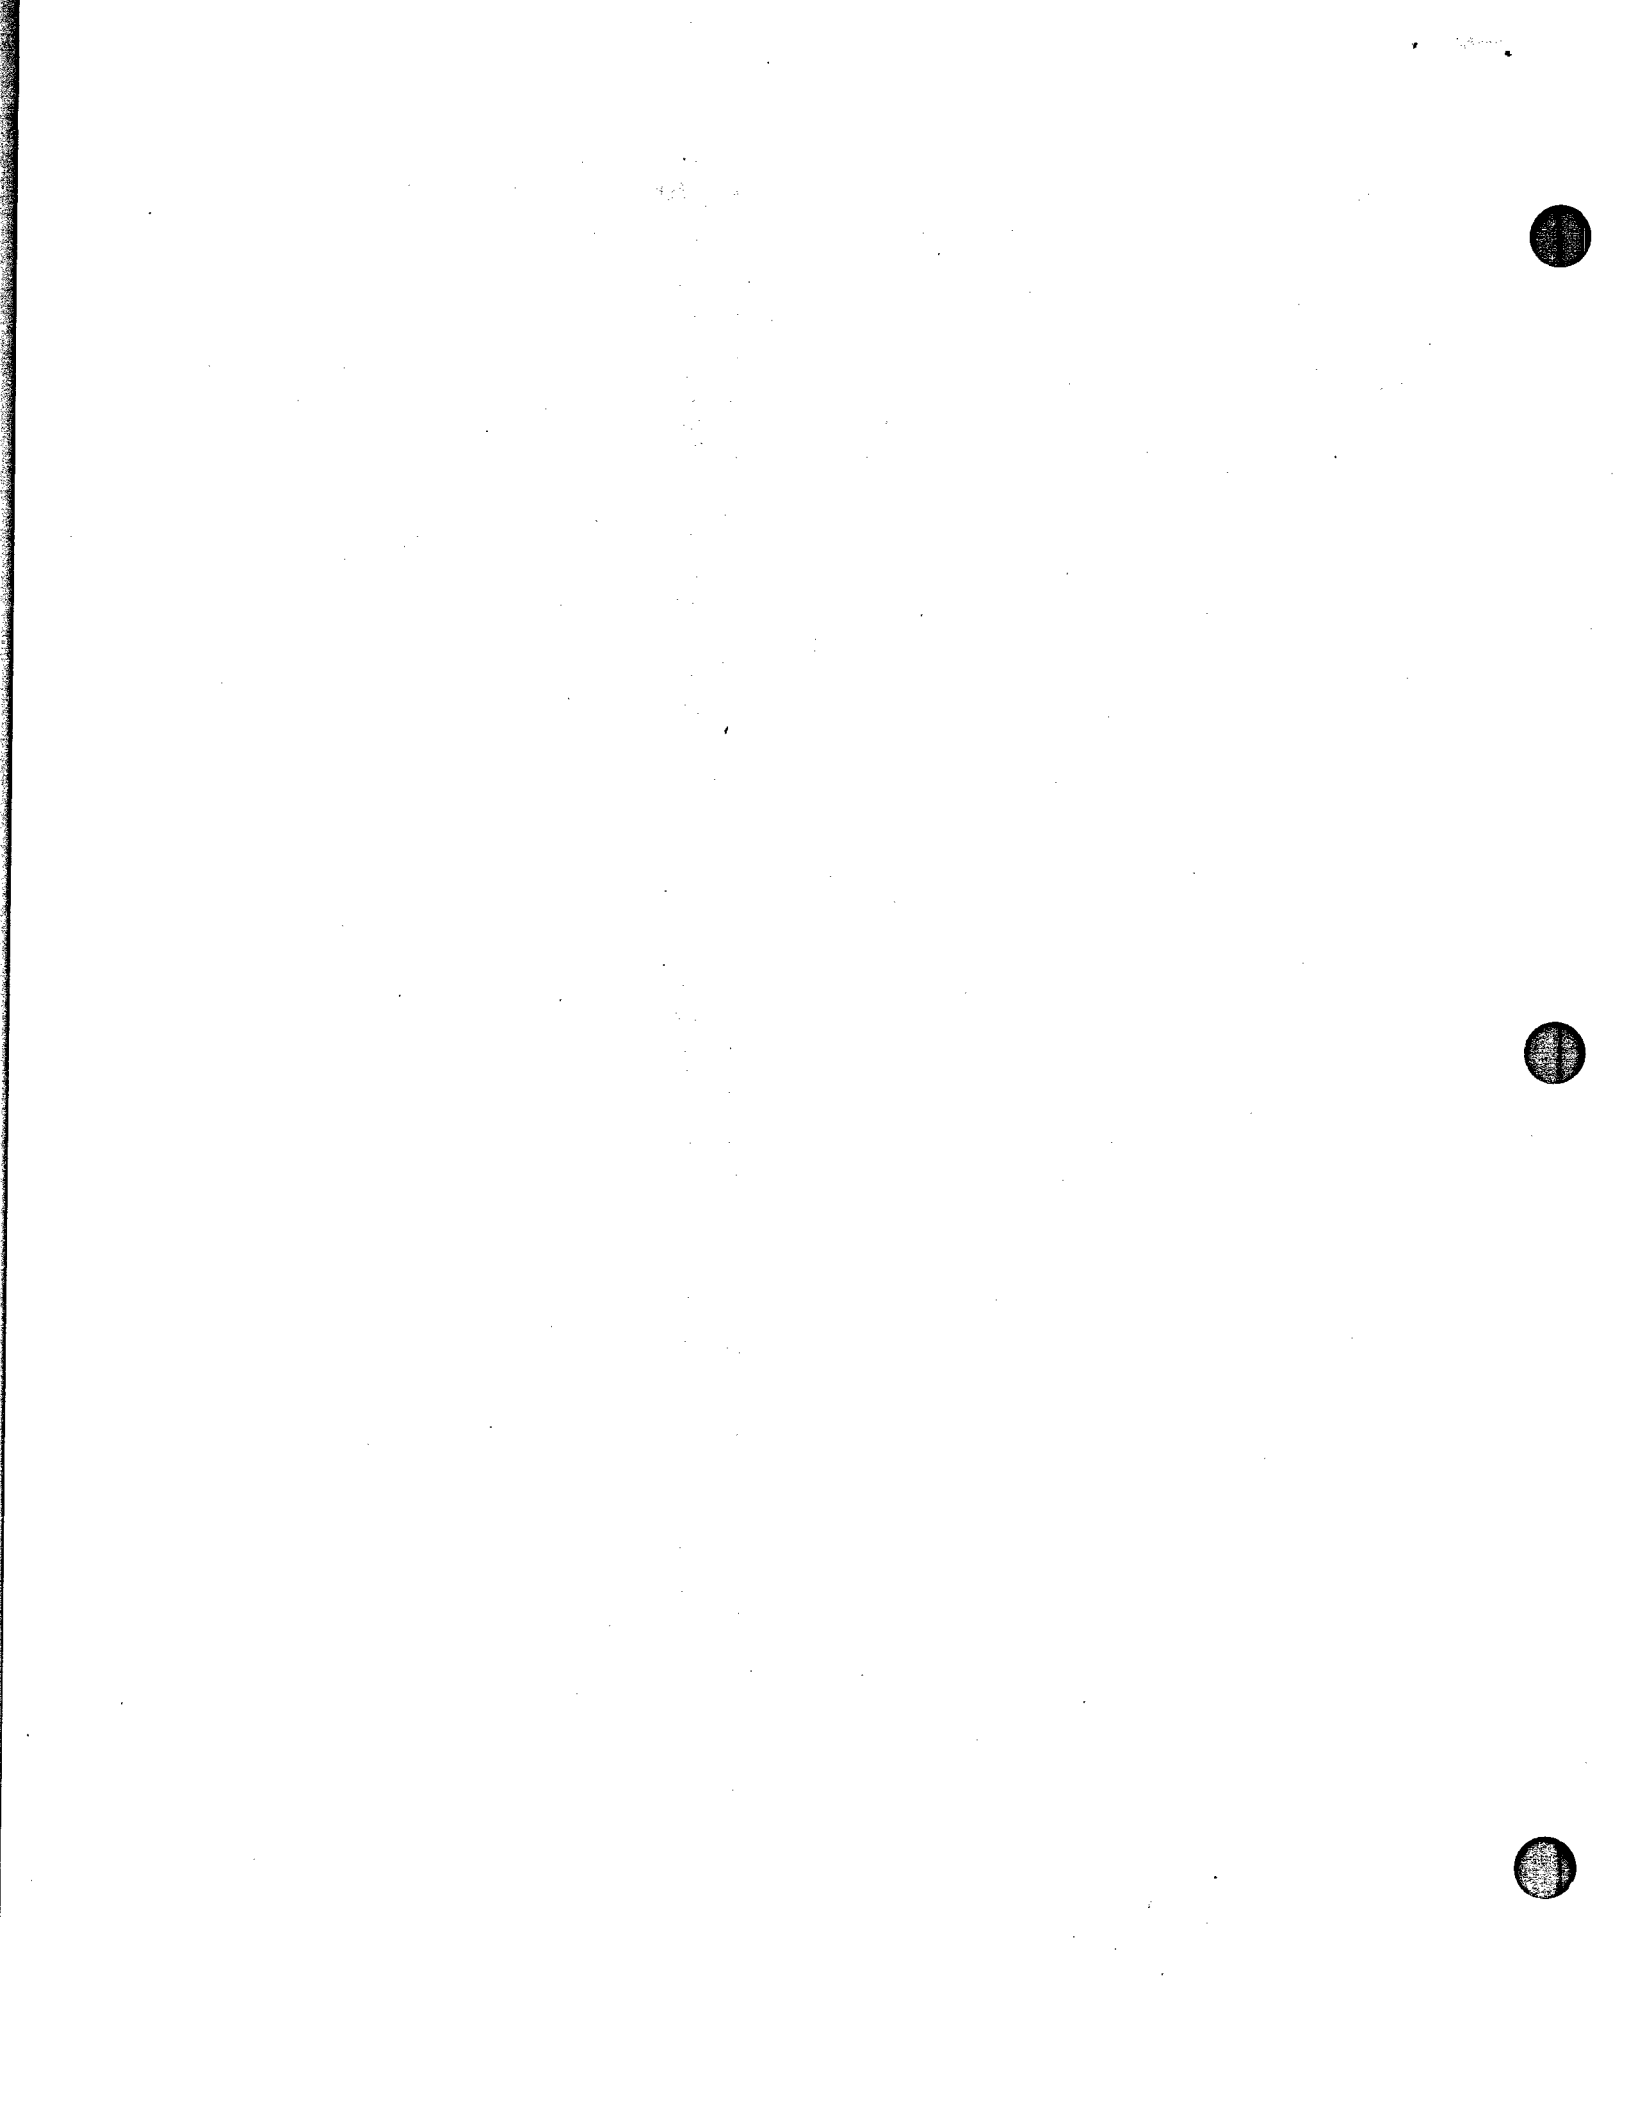

## Published Application Notes

### HP 3000

Following is a list of the Application Notes published to date. If you would like to order single copies of back issues please use the *Request Form* attached and indicate the number(s) of the note(s) you need, and the part number(s).

| Note # | Part Number | Topic  |
|--------|-------------|--|
| 1      | 5958-5824   | Printer Configuration Guide - Version 1                      |
| 2      | 5960-2841   | Terminal types for HP 3000 HPIB Computers - Version 1        |
| 3      | 5960-2842   | Plotter Configuration Guide                                  |
| 4      | 5960-2843   | Printer Configuration Guide - Version 2                      |
| 5      | 5960-2844   | MPE System Logfile Record Formats                            |
| 6      | 5960-2845   | Stack Operation  |
| 7      | 5960-2846   | COBOL II/3000 Programs: Tracing Illegal Data                 |
| 8      | 5960-2847   | KSAM Topics: COBOL's Index I/O: File Data Integrity          |
| 9      | 5960-2848   | Port Failures, Terminal Hangs, TERMDISM                      |
| 10     | 5960-2849   | Serial Printers - Configuration, Cabling, Muxes              |
| 11     | 5960-2850   | System Configuration or System Table Related Errors          |
| 12     | 5960-2851   | Pascal 3000 - Using Dynamic Variables                        |
| 13     | 5960-2852   | Terminal Types for HP 3000 HPIB Computers - Version 2        |
| 14     | 5960-2853   | Laser Printers - A Software and Hardware Overview            |
| 15     | 5960-2854   | FORTLAN Language Considerations - A Guide to Common Problems |
| 16     | 5960-2855   | IMAGE: Updating to TurboIMAGE & Improving Database Loads     |
| 17     | 5960-2856   | Optimizing VPLUS Utilization                                 |
| 18     | 5960-2857   | The Case of the Suspect Track for 792X Disc Drives           |
| 19     | 5960-2858   | Stack Overflows: Causes & Cures for COBOL II Programs        |
| 20     | 5960-2859   | Output Spooling  |
| 21     | 5960-2860   | COBOLII and MPE Intrinsic                                    |
| 22     | 5960-2861   | Asynchronous Modems  |

**HP 3000 (continued)**

| <b>Note #</b> | <b>Part Number</b> | <b>Topic</b>   |
|---------------|--------------------|--|
| 23            | 5960-2862          | VFC Files  |
| 24            | 5960-2863          | Private Volumes  |
| 25            | 5960-2864          | TurboIMAGE: Transaction Logging  |
| 26            | 5960-2865          | HP 2680A, 2688A Error Trailers   |
| 27            | 5960-2866          | HP Trend: An Installation and Problem Solving Guide                    |
| 28            | 5960-2867          | The Startup State Configurator   |
| 29            | 5960-2868          | A Programmer's Guide to VPLUS 3000                                     |
| 30            | 5960-2869          | Disc Cache   |
| 31            | 5960-2870          | Calling the CREATEPROCESS Intrinsic                                    |
| 32            | 5960-2871          | Configuring Terminal Buffers   |
| 33            | 5960-2872          | Printer Configuration Guide - Version 3                                |
| 34A           | 5960-2873          | RIN Management (Using COBOLII Examples) (A)                            |
| 34B           | 5960-2874          | Process Handling (Using COBOLII Examples) (B)                          |
| 35            | 5960-2875          | HPDESK IV (Script files, FSC, and Installation Considerations)         |
| 34C           | 5960-2876          | Extra Data Segments (Using COBOLII Examples) (C)                       |
| 36            | 5960-2877          | Tips for the DESK IV Administrators                                    |
| 37            | 5960-2878          | AUTOINST: Trouble-free Updates   |
| 38            | 5960-2879          | Store/Restore Errors   |
| 39            | 5960-2880          | MRJE Emulates a HASP Workstation                                       |
| 40            | 5960-2881          | HP 250 / 260 to HP 3000 Communications Guidelines                      |
| 41            | 5960-2882          | MPE File Label Revealed  |
| 42            | 5960-2883          | System Interrupts  |
| 43            | 5960-2884          | Run Time Aborts  |
| 44            | 5960-2885          | HPPA Patching Conventions for HP3000 900 Series Processors - Version 1 |
| 45            | 5960-2886          | Vplus & Multiplexers   |
| 46            | 5960-2887          | Setting Up an HPDesk HPTelex for the First Time                        |
| 47            | 5960-2900          | Customizing Database Data Items & Changing Passwords in JCL Files      |
| 48            | 5959-9215          | Printer Configuration - Version 4                                      |
| 49            | 5959-9227          | Configuring DATACOMM Products Into MPE                                 |
| 50            | 5959-9228          | VFC's for Serial Printers  |

**HP 3000 (continued)**

| <b>Note #</b> | <b>Part Number</b> | <b>Topic</b>  |
|---------------|--------------------|---|
| 51            | 5959-9237          | Terminal Types for the HP 3000 HPIB Computers   |
| 52            | 5959-9242          | Configuring MRJE  |
| 53            | 5959-9245          | Using Special Characters on the 700/9x Series Terminals                                   |
| 54            | 5959-9251          | Improving Database Performance  |
| 55            | 5959-9258          | Customized Message Catalogs and Help Facilities   |
| 56            | 5959-9266          | BRW Tips for Beginners  |
| 57            | 5959-9270          | Configuring the HP 2334A Plus & HP 2335A As a Statistical Multiplexer                     |
| 58            | 5959-9274          | HPPA Pathing Conventions for HP3000 900 Series Processors - Version 2                     |
| 59            | 5959-9289          | HP 2334A and HP 2335A Configuration Recipes   |
| 60            | 5959-9301          | TurboIMAGE's I-FILES and J-FILES  |
| 61            | 5959-7385          | HPDeskManager - Looking Behind the Scenes   |
| 62            | 5959-7803          | Setting Up a System Dictionary  |
| 63            | 5959-7834          | Configuring Telesupport Modems for MPE V/E Systems  |
| 64            | 5960-1816          | Finding Solutions in HP SupportLine   |
| 65            | 5960-1817          | Using the Electronic Call Feature of HP SupportLine                                       |
| 66            | 5960-1818          | Using the Feedback Feature of HP SupportLine  |
| 67            | 5960-1819          | Printing Documents from HP SupportLine  |
| 68            | 5960-1820          | HP SupportLine Commands   |
| 69            | 5960-2901          | Nonsystem Volume Sets and the Migration of Private Volumes to an S9000 HP 3000            |
| 70            | 5960-2907          | Modem Links for Remote Console and Standard DTC Connections on Commercial XL HPPA Systems |
| 71            | 5960-2918          | Asynchronous Cabling  |
| 72            | 5960-2919          | BRW Tips and Tricks   |
| 73            | 5960-2998          | SNA NRJE Configuration  |
| 74            | 5960-2999          | SNA IMF Configuration   |
| 75            | 5060-3000          | XL NRJE Configuration   |

**HP 3000 (continued) (continued)**

| <b>Note #</b> | <b>Part Number</b> | <b>Topic</b>   |
|---------------|--------------------|--|
| 76            | 5960-4301          | XL IMF Configuration   |
| 77            | 5960-4302          | Calling the BRW Intrinsic  |
| 78            | 5960-4303          | PUB.SYS What Is Behind It?   |
| 79            | 5960-4625          | Conquest of Disc Space   |
| 80            | 5960-4633          | Looking Behind the Scenes of Resource Sharing                      |
| 81            | 5960-4637          | MPE/XL System Interrupt Recovery Procedures                        |
| 82            | 5960-4347          | Private Volumes  |
| 83            | 5960-4396          | Serial Printer Configuration                                       |
| 84            | 5960-4334          | How to Migrate FORTRAN Programs to Newer Compilers and XL Hardware |
| 85            | 5960-4335          | The Optimization of Programs in MPE/XL                             |
| 86            | 5960-4643          | IBM Labeled Tapes Questions and Answers                            |
| 87            | 5960-4666          | Image Logging for HP Financial Accounting Databases                |
| 88            | 5960-4672          | Native Mode Spooler Questions and Answers                          |
| 89            | 5960-4673          | AUTOINST/XL Questions and Answers                                  |
| 90            | 5960-4701          | The New Spooler  |
| 91            | 5960-6659          | Using the Port Structure Under MPE/XL                              |

# HP 3000 Application Note Request

Please send me the HP 3000 Application Notes listed below. To order an Application Note just fill in the Application Note number and the part no. in the space provided below. (Use the Published Application Notes form)

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

AN    /    59    /    -    /    /    /    /

|                |           |                   |
|----------------|-----------|-------------------|
|                |           |                   |
| Business phone | Extension | Best time to call |

Name Title/Dept.

Company Division

Mailing Address Mail Stop/Bldg./Rm.

City State Zip Code

**BUSINESS REPLY MAIL**  
FIRST CLASS MAIL PERMIT NO. 809 CUPERTINO, CA

POSTAGE WILL BE PAID BY ADDRESSEE

HEWLETT-PACKARD  
19310 PRUNERIDGE AVE  
BLDG 49 AM  
CUPERTINO CA 95014-9826



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES



---

## Customer Comment Card

Application Note No.: \_\_\_\_\_

Part No.: \_\_\_\_\_

We welcome your evaluation of this Application Note. Your comments and suggestions will help us improve our publications. Attach additional pages if necessary.

Please circle the following Yes or No:

- |   |     |    |
|---|-----|----|
| ■ Is the information technically accurate?                                      | Yes | No |
| ■ Are instructions complete?  | Yes | No |
| ■ Are concepts and wording easy to understand?                                  | Yes | No |
| ■ Are the examples and pictures helpful?  | Yes | No |
| ■ Is the format of this note convenient in size, arrangement and readability?   | Yes | No |
| ■ Did you receive the published application notes requested in a timely manner? | Yes | No |

Additional Comments and/or suggestions for future application notes: \_\_\_\_\_

---

---

---

---

---

Please provide:

Name: \_\_\_\_\_ Title: \_\_\_\_\_

Company: \_\_\_\_\_ Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip Code/Country \_\_\_\_\_

Please send to :



No postage is required. Just remove this card, fold so that the pre-addressed label is on the outside, secure and mail.

Thank you for your assistance.



FOLD

FOLD



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES




**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 95, MT. VIEW, CA




POSTAGE WILL BE PAID BY ADDRESSEE

Learning Products Manager  
Hewlett-Packard Company  
100 Mayfield Avenue  
Mail Stop 37MA  
Attention: George Enos  
Mt. View, CA 94043



FOLD

FOLD



\*\* For HP Internal Reference Only \*\*

Customer Order Number

NONE

Printed in USA

Manufacturing Part Number

**5960-6659**

